

Description

FIELD OF THE INVENTION

The present invention relates to an optical fiber cable connector, and more particularly, to an improvement in or relating to a cable holder to be inserted into the connector housing.

BACKGROUND OF THE INVENTION

As is well known, optical fiber cable connectors are used for terminating optical fiber cables for coupling to other optical fiber cables which are terminated by mating optical fiber cable connectors. Japanese Utility Model Application Laid-Open Nos. 5-59412 and 1-177708 shows an optical fiber cable connector which comprises a housing having at least one cable insertion aperture for inserting an optical fiber cable, a holder slot extending along the cable insertion aperture, and at least one cable holder including a ceiling plate, and two opposite side walls integrally connected to the opposite longitudinal edges of the ceiling plate, each having cable gripping means to engage an optical fiber cable by penetrating the jacket of the optical fiber cable.

The cable holder has an inverted "U"-shape for pushing and holding an optical fiber cable in the cable insertion aperture.

A disadvantage of the inverted "U"-shaped holder is that it cannot hold an optical fiber cable against a relatively strong pulling force applied to the optical fiber cable, thus allowing the cable to be removed from the holder.

SUMMARY OF THE INVENTION

One object of the present invention is to provide an optical fiber cable connector whose cable holder can grip an optical fiber cable against a strong pull of the optical fiber cable.

To attain this object an optical fiber cable connector has a housing including at least one cable insertion aperture for inserting aperture, and at least one cable holder including a ceiling plate and two opposite side walls integrally connected to the opposite longitudinal edges of the ceiling plate. Each side wall has cable gripping means to engage the optical fiber cable by penetrating into the jacket of the optical fiber cable at least one pair of ramp projections inclined inward in the direction opposite to the direction in which the optical fiber cable may be pulled.

The cable gripping means may include two pairs of ramp projections arranged back and forth in the longitudinal direction, one and the other pair of ramp projections converging in opposite directions.

The cable gripping means may include two pairs of ramp projections arranged back and forth in the longitudinal direction, one and the other pair of projections converging toward each other.

The cable gripping means may include two pairs of ramp projections arranged back and forth in the longitudinal direction, one and the other pair of ramp projections converging in one and same direction.

These arrangements have the effect of increasing the resistance against a pulling force applied to an optical fiber cable, thus preventing the removal of the optical fiber cable from the connector.

The cable holder may be made of metal. The metal holder permits the stamping-out of cable gripping means from the opposite side walls of the inverted "U"-shaped holder. The cable holder may also be made of plastics and thus can be easily molded.

Each ramp projection may have a guide surface inclined downward to the adjacent side wall. This facilitates the inserting of the inverted "U"-shaped holder in the connector housing with its opposite side walls located close to the opposite sides of the optical fiber cable.

The cable holder may have detents projecting from the front and rear edges of each side wall to engage the front and rear walls of the holder slot of the housing thereby anchoring the cable holder in the holder slot.

The cable holder may also have at least one pair of cantilever-like projections extending from the opposite side walls for engaging and holding the jacket of the optical fiber cable.

The optical fiber cable may be all plastic fiber cable.

Other objects and advantages of the present invention will be understood from the following description of preferred embodiments of the present invention, which are shown in accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig 1 is a perspective view of the cable holder of an optical fiber connector according to a first embodiment of the present invention;

Fig 2 is a front view of the cable holder;

Fig 3 is a top view of the cable holder;

Fig 4 is a side view of the cable holder;

Fig 5 is a longitudinal section of the cable holder taken along the line A-A in Fig. 4;

Fig 6 is a similar longitudinal section of the cable holder, but showing it as having an optical fiber cable inserted;

Fig 7 is a cross section of the cable holder taken along the line B-B in Fig. 3;

Fig 8 is a cross section of the cable holder taken along the line C-C in Fig. 3;

Fig 9 is a top view of the holder slot in the optical fiber connector according to the first embodiment;

Fig 10 is a cross section of the optical fiber cable connector taken along the line J-J in Fig. 11;

Fig 11 is a top view of the optical fiber cable connector according to the first embodiment;

Fig 12 is a rear view of the optical fiber cable connector;

Fig. 13 is a front view of the optical fiber cable con-

nectors;

Fig. 14 is a bottom view of the optical fiber cable connector;

Fig. 15 is a side view of the optical fiber cable connector;

Fig. 16 is a longitudinal section of the optical fiber cable connector taken along the line E-E in Fig. 11;

Fig. 17 is a longitudinal section of the optical fiber cable connector taken along the line D-D in Fig. 11;

Fig. 18 is a longitudinal section of the optical fiber cable connector taken along the line F-F in Fig. 12;

Fig. 19 is a longitudinal section of an optical fiber cable connector according to a second embodiment of the present invention; and

Fig. 20 is a longitudinal section of an optical fiber cable connector according to a third embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figs. 1 to 18 show an optical fiber cable connector according to a first embodiment of the present invention. It includes a housing 2 and a cable holder 3. The housing 2 has two cable insertion apertures 4 for inserting optical fiber cables 6 and holder slots 5 extending along these cable insertion apertures 4, as best shown in Fig. 11. The two cable insertion apertures 4 run parallel, as best shown in Fig. 18. These cable insertion apertures 4 are open on the front side 2A of the housing 2, as shown from Fig. 13. The holder slots 5 for accommodating cable holders 3 are open on the top side 2B of the housing 2, as shown in Fig. 11. These holder slots 5 communicate with the associated cable insertion apertures 4.

As shown in Figs. 7, 8 and 10, the holder slot 5 is rectangular in cross section and has a cable stay 5A integrally connected to the bottom of the rectangular slot 5. The cable stay 5A has a concave tap 5Aa to accommodate the round optical fiber cable 6. The cable stay 5A has slots 5B on its opposite sides permitting the fitting-in of the opposite side walls 8 and 9 of an inverted "U"-shaped cable holder 3 (later described in detail). As seen from Figs. 9 and 10, vertical ridges 5D are formed on the opposite side walls 5Ca and 5Cb of the holder slot 5 for pushing the outer surfaces 8A and 9A of the opposite side walls 8 and 9 of the inverted "U"-shaped cable holder 3 against the opposite sides 5Ab of the cable stay 5A when the cable holder 3 is inserted in the holder slot 5.

As shown in Figs. 1, 2, 3 and 4, the cable holder 3 includes ceiling plate 10, and two opposite side walls 8 and 9 integrally connected to the opposite longitudinal edges of the ceiling plate 10.

Each side wall has cable gripping means to engage the optical fiber cable 6 by penetrating the jacket 6A of the optical fiber cable 6.

The structure described so far is found in the conventional optical fiber connector described earlier. The

central feature of the present invention resides in the cable gripping means including at least one pair of ramp projections 11 projecting from the opposite side walls 8 and 9, and inclined inward in the direction opposite to the direction "N" in which the optical fiber cable 6 is pulled.

As shown in Fig. 1, two pairs of forward and rearward ramp projections 11 are formed in the longitudinal direction "Z" by cutting and projecting the cut portions from the opposite side walls 8A and 9A so that these two pairs of ramp projections may converge in the opposite directions. Specifically one pair of ramp projections 11 are at angle in the direction opposite to the direction "N" on which the optical fiber cable 6 is pulled whereas the other pair of ramp projections 11 are at angle in the pulling direction "N", as best seen in Figs. 5 and 6.

The ramp projection 11 has a guide surface 11A inclined downward to its respective side wall 8 or 9, thereby facilitating the guiding of the cable holder 3 to the opposite sides of the optical fiber cable 6 when the cable holder 3 is inserted in the holder slot 5 of the housing 2.

Also, the cable holder 3 has one pair of cantilever-like projections 12 extending from the opposite side walls 8 and 9 between the forward and rearward ramp projections 11. Such cantilever-like projections 12 can be formed by cutting rectangular portions and bending them inward towards the opposite side walls 8A and 9A. These cantilever-like projections 12 push down and retain the jacket 6A of the optical fiber cable 6 with their undersurfaces 12A when the cable holder 3 is inserted in the holder slot 5 of the housing 2.

The cable holder 3 has detents 13 projecting from the front and rear edges 8B, 8C, 9B, 9C of each side wall 8 or 9 as shown in Fig. 1. These detents 13 will engage the front and rear walls 5Ea, 5Eb of the holder slot 5, thereby preventing the cable holder 3 from coming out from the holder slot 5 in the direction "M" (see Figs. 7 and 8). The cable holder 3 may be of metal, and can be provided by stamping out of a metal sheet blank.

In use, first, an optical fiber cable 6 such as all plastic fiber cable is inserted in each cable insertion aperture 4 of the housing 2, and then, the inverted "U"-shaped cable holder 3 is inserted in each holder slot 5. When the cable holder 3 is inserted, its guide surfaces 11A slide on the optical fiber cable 6 until its ramp projections 11 are put on the opposite sides of the optical fiber cable 6 with its opposite bottom edges fitted in the opposite slots 5B, which are defined between the cable stay 5A and either side wall of the holder slot 5, as shown in Fig. 7.

The optical fiber cable 6 on the cable stay 5A is sandwiched between the ramp projections 11, which penetrate the jacket 6A of the optical fiber cable 6, and at the same time, the optical fiber cable 6 is pushed down and retained by the opposite cantilever-like projections 12. Thus, the optical fiber cable 6 is prevented from moving in the direction "N" in which a pulling force can be applied to the optical fiber cable 6.

Fig. 19 shows only a selected portion of an optical fiber cable connector according to a second embodiment. The selected portion includes features which distinguish the second embodiment from the first embodiment. As shown in Fig. 19, the cable gripping means comprises two pairs of ramp projections 11 arranged back and forth in the longitudinal direction "Z", with both pairs of ramp projections converging toward each other. Specifically, one pair of ramp projections 11 extend in the direction opposite to the direction "N" in which a pulling force can be applied to the optical fiber cable 6. The other pair of ramp projections 11 extend in the pulling direction "N".

Fig. 20 shows a selected portion of an optical fiber cable connector according to a third embodiment. As shown in Fig. 20, both pairs of ramp projections converge in the same direction so that they extend in the direction opposite to the pulling direction "N".

The first, second and third embodiments are described as having two pairs of ramp projections, but the number of pairs may be other than two. The cable holder 3 may be of a plastic molded part.

Claims

1. An optical fiber cable connector comprising:

a housing 2 having at least one cable insertion aperture 4 for inserting an optical fiber cable 6 and a holder slot 5 extending along the cable insertion aperture 4;

a cable holder 3 comprising a ceiling plate 10, and two opposite side walls 8 and 9 integrally connected to the opposite longitudinal edges of the ceiling plate 10, each side wall having cable gripping means to engage the optical fiber cable 6 by penetrating the jacket 6A of the optical fiber cable; and

characterized in the said cable gripping means comprises at least one pair of ramp projections 11 inclined inward in the direction which is opposite to the direction "N" in which the optical fiber cable 6 extends.

2. An optical fiber cable connector to claim 1, wherein said cable gripping means comprises two pairs of ramp projections 11 arranged back and forth in the longitudinal direction "Z", both pairs of ramp projections converging in opposite directions.

3. An optical fiber cable connector according to claim 1, wherein said cable gripping means comprises two pairs of ramp projections 11 arranged back and forth in the longitudinal direction "Z", both pairs of ramp projections converging toward each other.

4. An optical fiber cable connector according to claim 1, wherein said cable gripping means comprises two pairs of ramp projections 11 arranged back and

forth in the longitudinal direction "Z", both pairs of ramp projections converging in the same direction.

5. An optical fiber cable connector according to claim 1, wherein said cable holder 3 is made of metal.

6. An optical fiber cable connector according to claim 1, wherein said cable holder 3 is made of plastics.

7. An optical fiber cable connector according to claim 1, wherein each of said projections 11 has a guide surface 11A inclined downward towards its respective side wall 8 or 9.

8. An optical fiber cable connector according to claim 1, wherein said cable holder 3 has projections 13 extending from the front and rear edges 8B, 8C, 9B, 9C of each side wall 8 or 9 to be engaged by the front and rear walls 5Ea, 5Eb of said holder slot 5, thereby fixing said cable holder 3 in said holder slot 5.

9. An optical fiber cable connector according to claim 1, wherein said cable holder 3 has at least one pair of cantilever-like projections 12 extending from said opposite side walls 8 and 9 engaging the optical fiber cable 6.

10. An optical fiber cable connector according to claim 1, wherein said optical fiber cable is all plastic fiber cable.

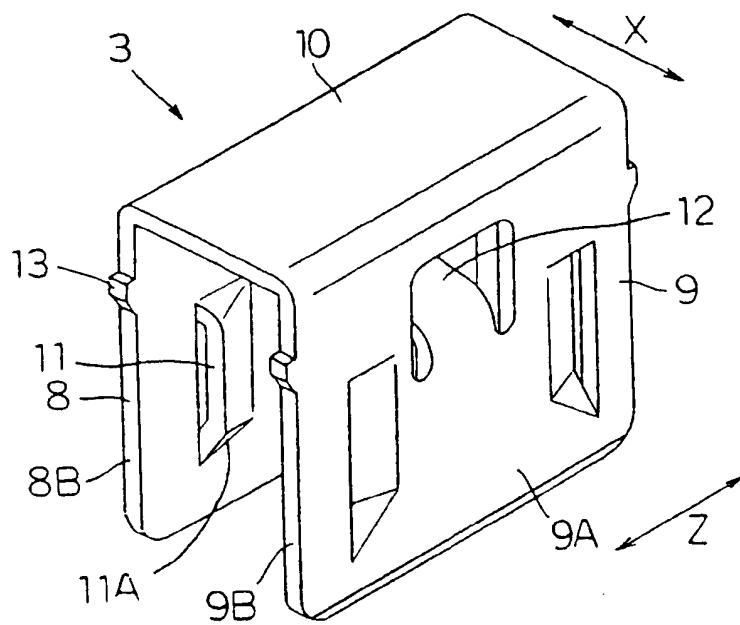


FIG. 1

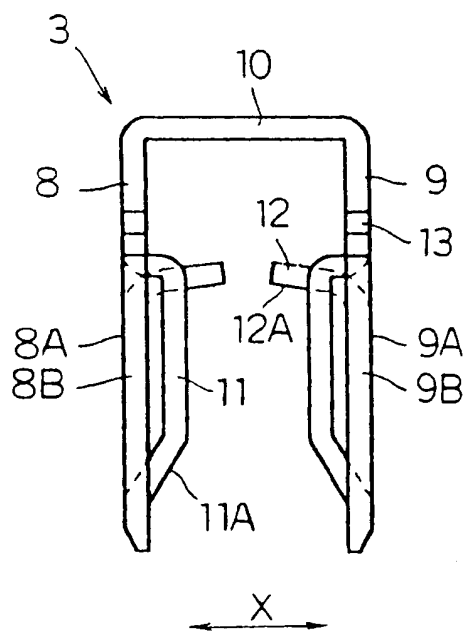


FIG. 2

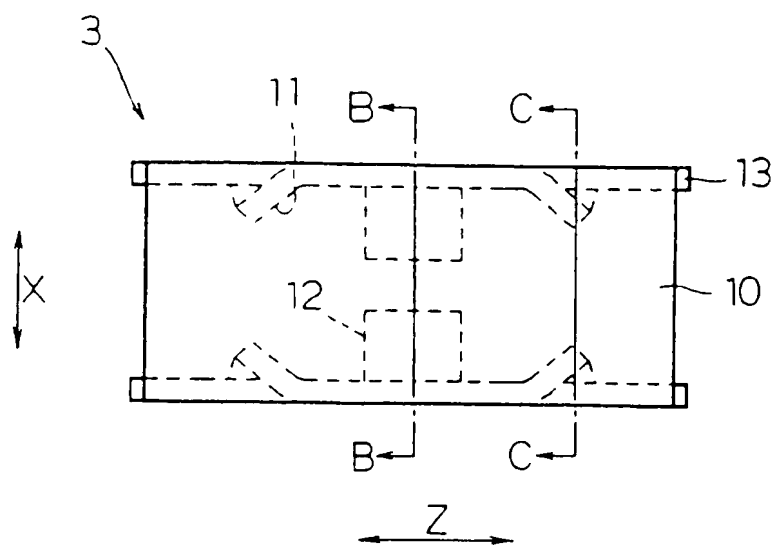


FIG. 3

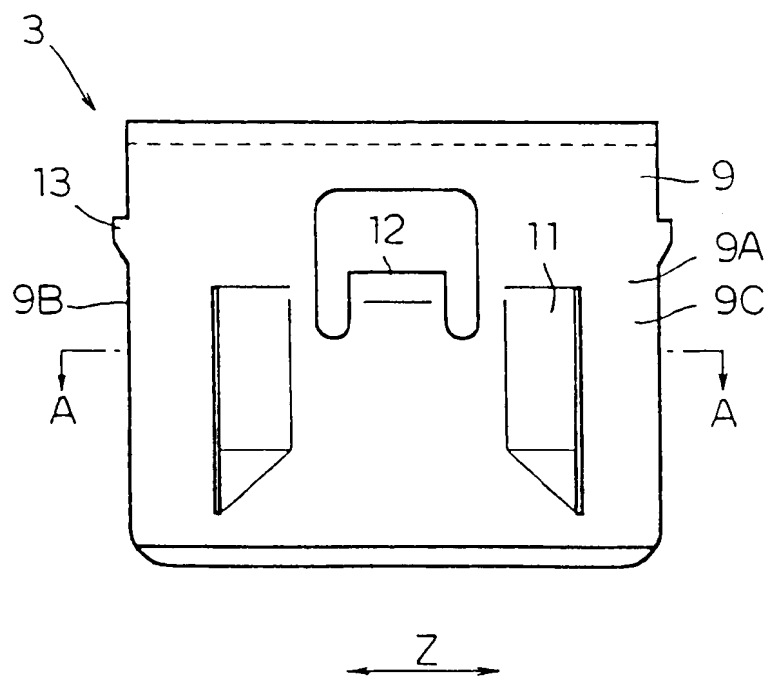


FIG. 4

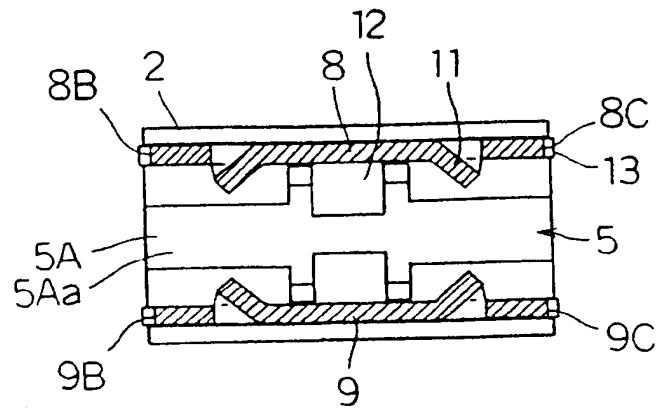


FIG. 5

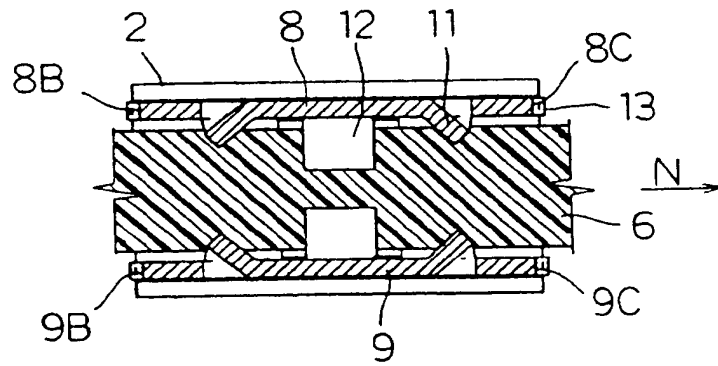


FIG. 6

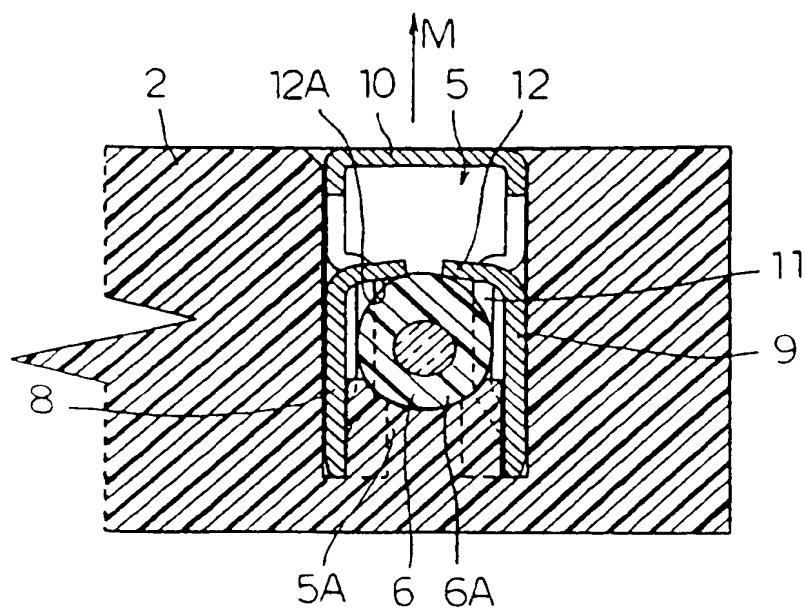


FIG. 7

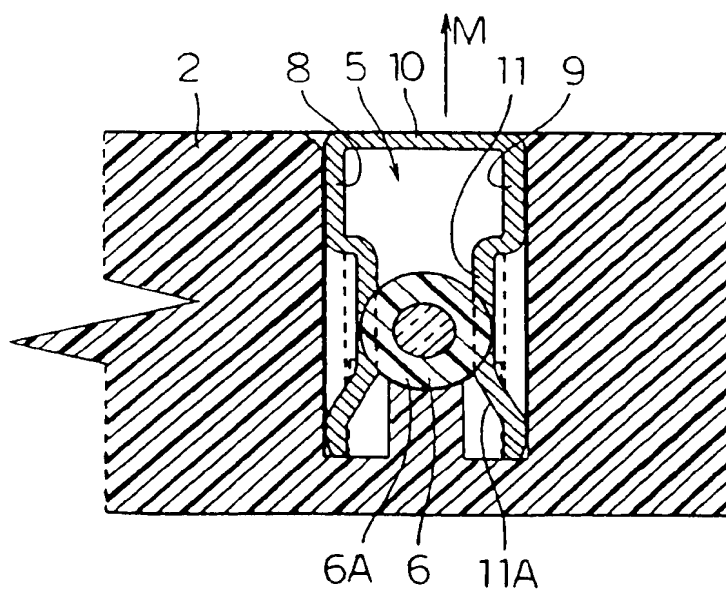


FIG. 8

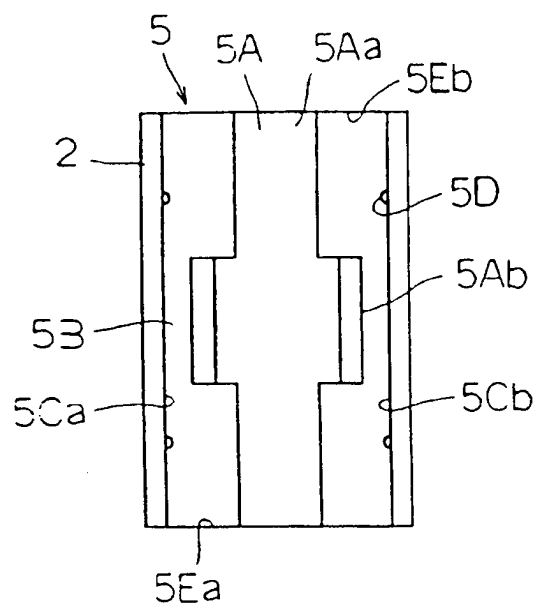


FIG. 9

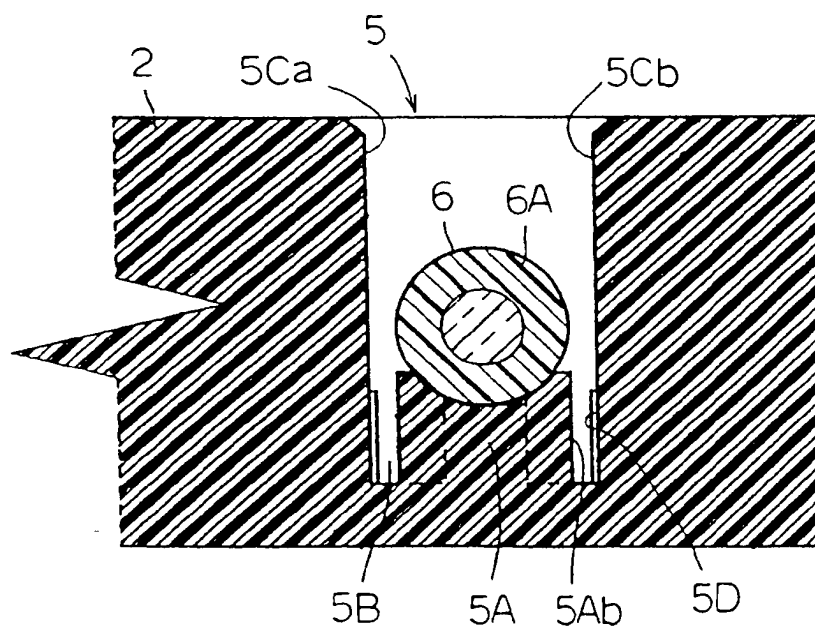


FIG. 10

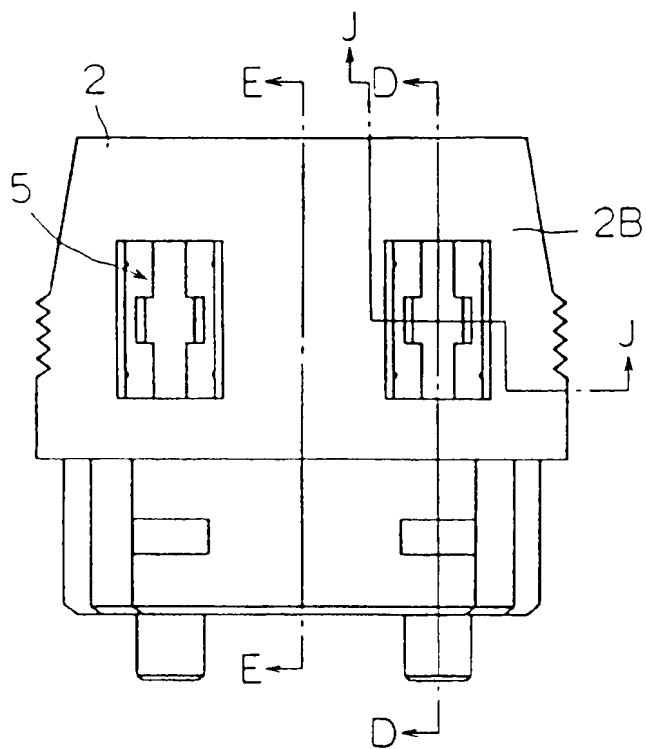


FIG. 11

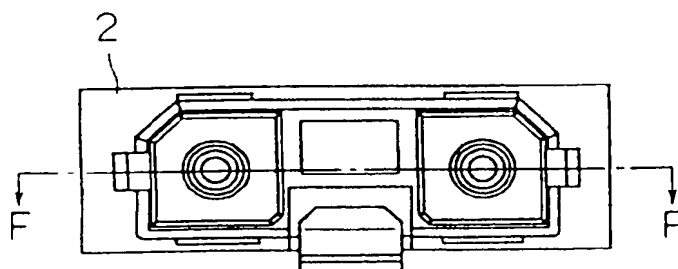


FIG. 12

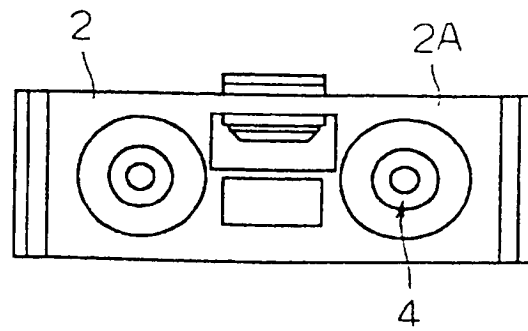


FIG. 13

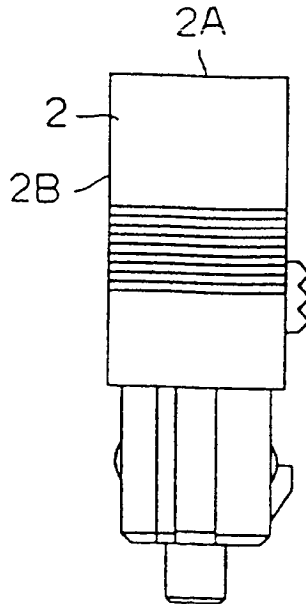


FIG. 15

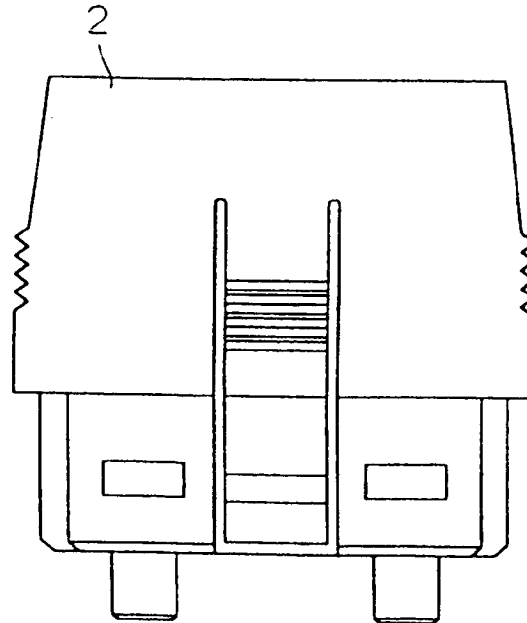


FIG. 14

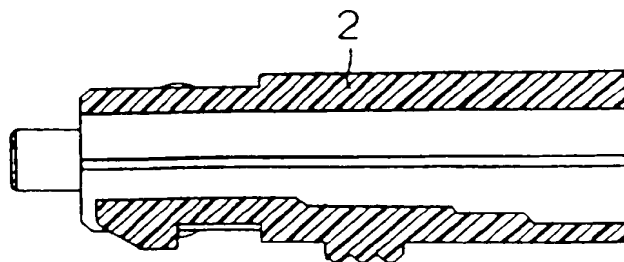


FIG. 16

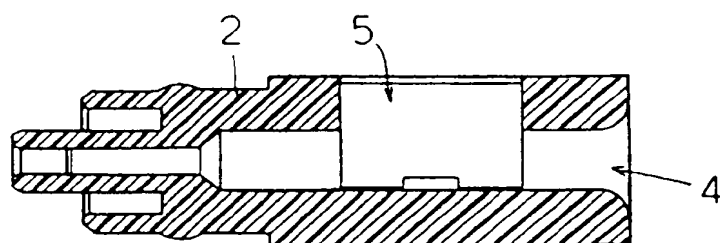


FIG. 17

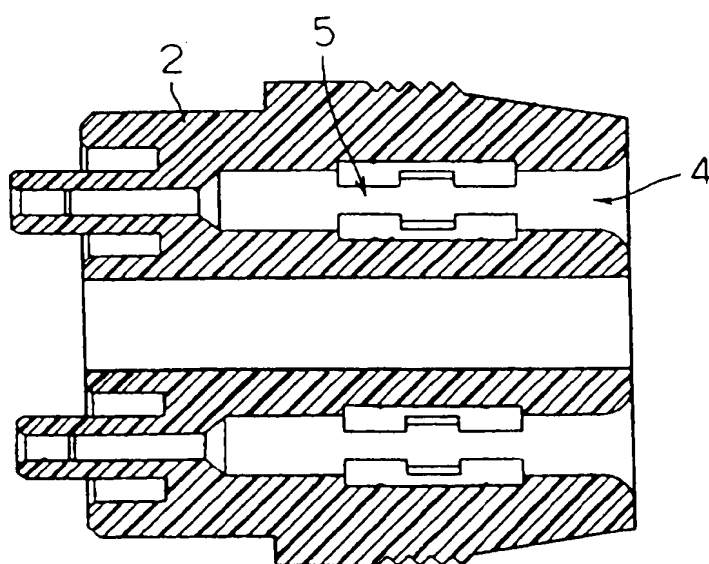


FIG. 18

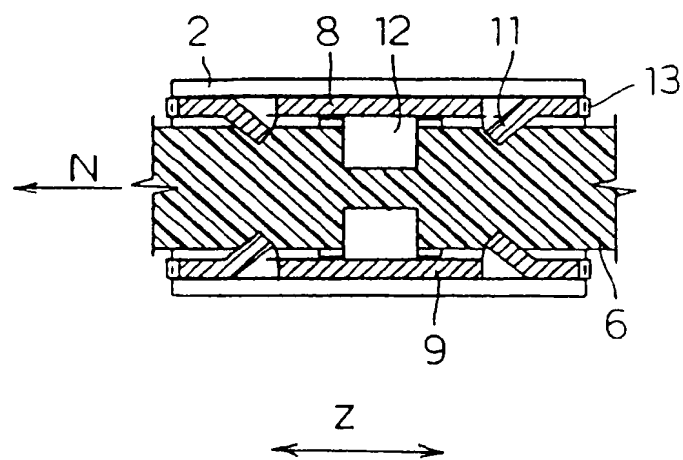


FIG. 19


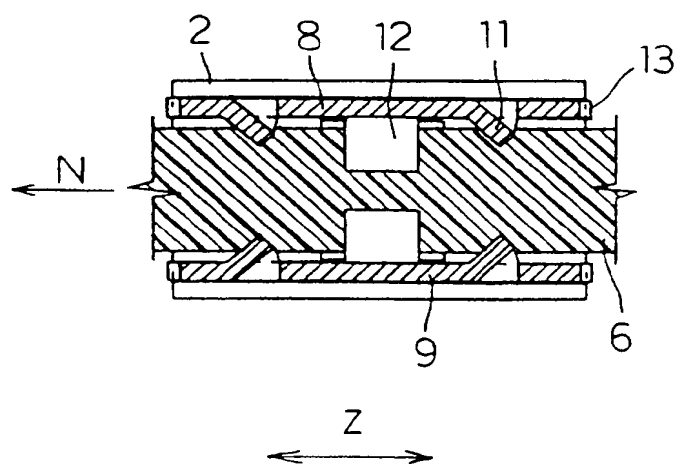


FIG. 20





(88) Date of publication A3:
10.02.1999 Bulletin 1999/06

(51) Int. Cl.⁶: **G02B 6/38**, G02B 6/44

(43) Date of publication A2:
02.05.1997 Bulletin 1997/18

(21) Application number: 96116562.8

(22) Date of filing: 16.10.1996

(84) Designated Contracting States:
DE FR GB IT

(30) Priority: 26.10.1995 JP 302180/95

(71) Applicant: MOLEX INCORPORATED
Lisle Illinois 60532 (US)

(72) Inventors:
• **Masonori, Yagi**
Ebina-shi, Kanagawa-ken (JP)

- **Hiroyuki, Fujii**
Asahi-ku, Yokohama-shi, Kanagawa-ken (JP)

(74) Representative:
Blumbach, Kramer & Partner GbR
Patentanwälte,
Alexandrastrasse 5
65187 Wiesbaden (DE)

(54) **Optical fiber cable connector**

(57) Disclosed is an improved optical fiber cable connector having at least one pair of ramp projections (11) inclined inward to engage an optical fiber cable for preventing removal of the cable from the connector by a pulling force applied to the cable.

The ramp projection (11) has a guide surface (11A) inclined downward to its respective side wall (8 or 9), thereby facilitating the guiding of the cable holder (3) to the opposite sides of the optical fiber cable (6) when the cable holder (3) is inserted in the holder slot (5) of the housing (2).

Also, the cable holder (3) has one pair of cantilever-like projections (12) extending from the opposite side walls (8 and 9) between the forward and rearward ramp projections (11). Such cantilever-like projections (12) can be formed by cutting rectangular portions and bending them inward towards the opposite side walls (8A and 9A). These cantilever-like projections (12) push down and retain the jacket (6A) of the optical fiber cable (6) with their undersurfaces (12A) when the cable holder (3) is inserted in the holder slot (5) of the housing (2).

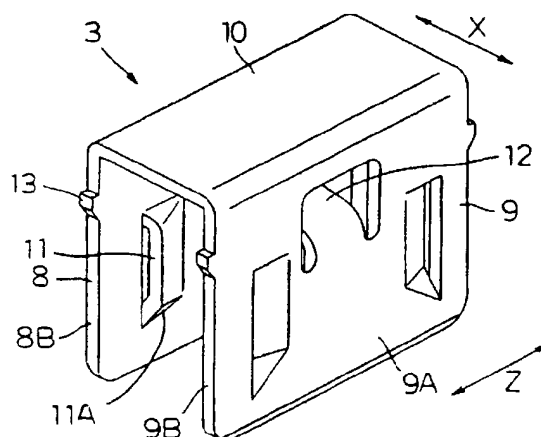


FIG. 1



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 96 11 6562

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	DE 90 10 357 U (HEINRICH ZEHNDER GMBH) 27 September 1990 * page 5, line 4-24 *	1	G02B6/38 G02B6/44
Y	* figures 3,7-10 *	1-8	
Y	EP 0 141 423 A (RUTSATZ KARL HEINZ) 15 May 1985 * page 7, line 21 - page 8, column 28 * * abstract; figures 1-5 * * page 9, line 24-34 *	1,7	
Y	GB 1 487 554 A (CRABTREE & CO LTD J A) 5 October 1977 * page 3, line 116 - page 4, column 44; figures 1,3,5,6,8 *	1,6	
Y	GB 2 274 210 A (DUGMORE PETER BALFOUR) 13 July 1994 * abstract; figures 10A,10B * * page 13, line 26 - page 15, line 8 *	1,6	
Y	US 4 415 232 A (CARON BERNARD G) 15 November 1983 * abstract; figure 2 * * column 2, line 31-50 *	1,5	TECHNICAL FIELDS SEARCHED (Int.Cl.6) G02B H01R
Y	JP 05 059412 U (AMP INCORPORATED) 6 August 1993 * figure 2 *	1,8	
Y	DE 43 25 052 A (SIEMENS AG) 2 February 1995 * abstract; figure 1 * * page 3, line 3-15 *	1-4	
-/--			
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 11 December 1998	Examiner Beaven, G
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X particularly relevant if taken alone Y particularly relevant if combined with another document of the same category A technological background O non-written disclosure P intermediate document</p> <p>T theory or principle underlying the invention E earlier patent document, but published on, or after the filing date D document cited in the application L document cited for other reasons & member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 96 11 6562

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
Y	US 5 452 386 A (VAN WOESIK EGBERTUS T C M) 19 September 1995 * abstract; figure 11 * * column 4, line 64 - column 5, line 7 * ----	1,8	
Y	DE 41 13 114 A (SIEMENS AG) 29 October 1992 * column 2, line 43-62; figures 8,9 * -----	1-4	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 11 December 1998	Examiner Beaven, G
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/82 (P4/C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 96 11 6562

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

11-12-1993

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 9010357 U	27-09-1990	NONE	
EP 0141423 A	15-05-1985	DE 3340341 A	27-06-1985
GB 1487554 A	05-10-1977	HK 29183 A	26-08-1983
		ZA 7406612 A	31-12-1975
GB 2274210 A	13-07-1994	NONE	
US 4415232 A	15-11-1983	AT 20391 T	15-06-1986
		CA 1196221 A	05-11-1985
		EP 0061243 A	29-09-1982
		EP 0154781 A	18-09-1985
		HK 48389 A	23-06-1989
		JP 1006441 B	03-02-1989
		JP 1527274 C	30-10-1989
		JP 57161820 A	05-10-1982
JP 05059412 U		NONE	
DE 4325052 A	02-02-1995	NONE	
US 5452386 A	19-09-1995	DE 69223949 D	12-02-1998
		DE 69223949 T	30-04-1998
		EP 0574462 A	22-12-1993
		WO 9214179 A	20-08-1992
DE 4113114 A	29-10-1992	DE 4104530 C	14-05-1992

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82